

# HENRY LONDON

Your Henry London watch is designed in England & manufactured to the very highest of standards. These instructions are provided to ensure your watch gives you excellent service, please read them carefully & retain them for future reference.


## THREE HANDS WITH DATE - 39mm

### SETTING THE TIME

Pull the crown out to the 2nd position (B). Turn the crown clockwise to set hour and minute hands. Push the crown back into its normal position. The second hand will then resume.

### SETTING THE DATE

1. Pull the crown out to the 1st position (A).
  2. Turn the crown anti-clockwise to set the date.
- Note: If the date is set between the hours of around 9:00pm and 1:00am, the date may not change the following day.
3. After the date has been set, push the crown back into its normal position.

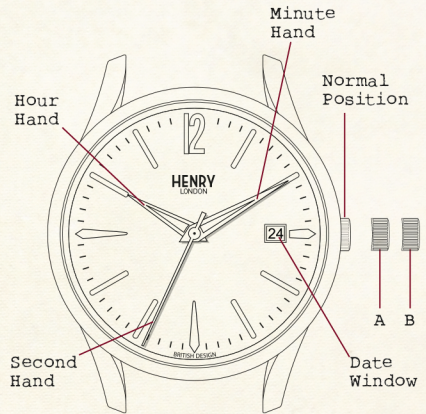

### MESH BRACELET ADJUSTMENT

If your Henry London watch has a mesh bracelet, please follow these instructions to ensure you get a perfect fit. Unlock clamp plate by using an appropriate tool. Move the entire clasp to adjust length by sliding along the bracelet. Adjust length while wearing the watch to make sure you get a good fit. Make sure the clasp locates into a molded indent on back of bracelet. Lock clamp plate in position by pressing it into place using your thumb. Do not use retaining bar to gain leverage as this will cause damage preventing the clasp to lock.

